



## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<b>(51) International Patent Classification <sup>5</sup> :</b> <b>C09J 7/02</b>	<b>A1</b>	<b>(11) International Publication Number:</b> <b>WO 93/03107</b> <b>(43) International Publication Date:</b> 18 February 1993 (18.02.93)
<b>(21) International Application Number:</b> PCT/US92/05314 <b>(22) International Filing Date:</b> 23 June 1992 (23.06.92)  <b>(30) Priority data:</b> 740,323                      5 August 1991 (05.08.91)                      US  <b>(71) Applicant:</b> MINNESOTA MINING AND MANUFACTURING COMPANY [US/US]; 3M Center, P.O. Box 33427, Saint Paul, MN 55133-3427 (US).  <b>(72) Inventors:</b> CALHOUN, Clyde, D. ; KESSEL, Carl, R. ; P.O. Box 33427, Saint Paul, MN 55133-3427 (US).  <b>(74) Agents:</b> NEAVEILL, Darla, P. et al. ; Office of Intellectual Property Counsel, Minnesota Mining and Manufacturing Company, Post Office Box 33427, Saint Paul, MN 55133-3427 (US).		<b>(81) Designated States:</b> AU, BR, CA, JP, KR, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IT, LU, MC, NL, SE).  <b>Published</b> <i>With international search report.</i>
<b>(54) Title:</b> STRUCTURED FLEXIBLE CARRIER WEB BEARING A LAYER OF SILICONE ON PREDETERMINED SURFACES  <b>(57) Abstract</b>  A flexible carrier web has a planar surface bearing thereon a predetermined pattern consisting of at least one flat land area and at least one recess having a base and walls, and a layer of silicone on the land and/or the base of the recess while the walls of the recess are substantially free from the silicone. When that flexible carrier web is used as the backing of a pressure-sensitive adhesive layer, release values can be controlled simply by selecting the size and/or number of recesses.		

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	FI	Finland	MN	Mongolia
AU	Australia	FR	France	MR	Mauritania
BB	Barbados	GA	Gabon	MW	Malawi
BE	Belgium	GB	United Kingdom	NL	Netherlands
BF	Burkina Faso	GN	Guinea	NO	Norway
BG	Bulgaria	GR	Greece	NZ	New Zealand
BJ	Benin	HU	Hungary	PL	Poland
BR	Brazil	IE	Ireland	PT	Portugal
CA	Canada	IT	Italy	RO	Romania
CF	Central African Republic	JP	Japan	RU	Russian Federation
CG	Congo	KP	Democratic People's Republic of Korea	SD	Sudan
CH	Switzerland	KR	Republic of Korea	SE	Sweden
CI	Côte d'Ivoire	LI	Liechtenstein	SK	Slovak Republic
CM	Cameroon	LK	Sri Lanka	SN	Senegal
CS	Czechoslovakia	LU	Luxembourg	SU	Soviet Union
CZ	Czech Republic	MC	Monaco	TD	Chad
DE	Germany	MG	Madagascar	TG	Togo
DK	Denmark	ML	Mali	UA	Ukraine
ES	Spain			US	United States of America

STRUCTURED FLEXIBLE CARRIER WEB BEARING A LAYER OF  
SILICONE ON PREDETERMINED SURFACES

5

Background of the Invention

Field of the Invention

The invention concerns a flexible carrier web having on at least a portion thereof a silicone layer and a method by which a layer of silicone can be applied to a flexible carrier web. The invention also concerns pressure-sensitive adhesive tapes that employ such flexible carrier webs as backings.

15

Description of the Related Art

It has long been recognized that silicone layers afford excellent release to layers of pressure-sensitive adhesive tapes, however release values provided by silicone layers tend to be undesirably low for many uses, e.g., about 4-60 g/cm of width. In an attempt to control the release properties, it has been suggested that the silicone be applied only to a portion of the desired substrate.

In U.S. Pat. No. 4,171,397 (Morrow), the release properties are regulated by first coating a sheet substrate with a fluorochemical polymer consisting of a perfluoroalkylsulfonamide lower alkyl acrylate and the reaction product of perfluoroalkyl-sulfonamidolalkanol, toluene diisocyanate, and hydroxypropylmethacrylate. The fluorochemical must have surface energy properties such that the contact angle of a drop of ethanol on a smooth surface thereof is at least 30°. Silicone-forming reactants are then overcoated in a manner providing a patterned silicone layer to attain release values determined by the relative exposed amounts of the fluorochemical and silicone.

In U.S. Pat. No. 3,503,782 (Ayres), a desired release value was obtained by first applying a full coating of a silicone release agent followed by a partial coating of a different silicone, preferably in the form of a pattern.

-2-

German Offenlegungsschrift P 37 27 078  
(Skurnia et al.), published 23 February 1989, discloses  
that, while pattern release coatings have been discussed  
for 30 years, problems associated with processing and use  
5 have not been resolved. This reference uses a method  
wherein two layer screen-printed silicone release  
coatings are made on a substrate by priming with a  
commercially available primer. Specifically disclosed  
primers include isocyanate-linked polyvinyl acetate, and  
10 solutions of chromosterate complexes mixed with polyvinyl  
alcohol. The silicone is then overcoated to cover from  
20% to 80% of the surface.

However, because these methods require the  
complete coating with one primer or release agent which  
15 is then overcoated, several processing steps are  
required, and there is a significant amount of waste.

PCT Appln. Publ. No. WO 90/07560, published 12  
July 1990 (Jung et al.), discloses release values in  
excess of 100 gm per centimeter of width from patterned  
20 silicone release coating. The release coating is  
prepared by engraving an outer roll surface of a roll-  
coater with a pattern corresponding to the desired  
silicone pattern, and then coating a substrate with such  
roll to obtain a definite geometric pattern. However,  
25 this method is expensive as it requires a custom-made  
roll-coater for each pattern desired.

Another use of patterned silicone layers is to  
confer repositionability onto a tacky adhesive tape. In  
U.S. Pat. No. 3,554,835 (Morgan), a pattern of silicone  
30 dots was applied to the face of a pressure-sensitive  
adhesive tape. The dots allow a sheet of the tape to be  
slid over a substrate until pressure is applied to force  
the adhesive into contact with the substrate.

Patterned silicone layers are produced on  
35 printing plates, e.g., "Toray Waterless Plate", available  
from Toray Industries, and the like. Such a printing  
plate is a flexible sheet of aluminum bearing a layer of  
photosensitive material covered with a layer of silicone  
rubber. Upon exposure to light through a half-tone

-3-

screen, the photosensitive material of a positive-acting plate binds firmly to the silicone rubber in areas where the light strikes. In the unexposed regions, the silicone can be brushed off, leaving the silicone layer in the predetermined pattern provided by the light exposure. Methods of making a printing plate based on photoimageable silicone are described in U.S. Pat. No. 3,511,178 (Curtin) and in U.S. Pat. No. 4,985,342 (Muramoto et al.).

10 In U.S. Pat. No. 4,930,266 (Calhoun et al.), a Toray printing plate having a pattern of silicone dots was wrapped on a cylinder and rotated through a fluidized bed of abrasive granules. The granules were attracted to the silicone dots. Upon moving a binder-carrying backing in synchronism with the rotating printing plate, the granules were picked up by and became embedded into the binder in the pattern of the printing plate. By thus individually positioning abrasive granules in a predetermined pattern, abrasive sheeting can produce fine finishes at surprisingly high cutting rates.

20 Another use of a Toray printing plate is disclosed in EPO Pat. Appln. Publ. No. 0,330,452, published 30 Aug. 1989 (Calhoun et al.). Electrically conductive particles are attracted to silicone dots and then individually transferred to an adhesive layer to make the adhesive layer electrically conductive orthogonally to its face while the adhesive layer remains electrically insulative laterally.

30 A method has now been discovered whereby single-layer patterned silicone release coatings can be made using conventional coating apparatus.

#### Summary of the Invention

35 The present invention provides, for the first time, the capability of creating a patterned silicone layer using ordinary coating apparatus, i.e., on apparatus designed to create continuous coatings. Thus, the present invention makes the use of patterned silicone layers more economical and should ease production of a

-4-

variety of useful products.

When that flexible carrier web is used as the backing of a pressure-sensitive adhesive layer, release values can be controlled simply by selecting the size  
5 and/or number of the recesses.

The flexible carrier web can also be used to transfer particles to a tacky adhesive layer in a pattern, because dry particles tend to adhere only to the silicone layer. Hence, such particles can be transferred  
10 to said tacky adhesive layer in the pattern of the land. On the other hand, a slurry of particles tends to wet only the silicone-free regions of the recesses, and the dried slurry can be transferred to said tacky adhesive layer in the pattern of the recesses.

More specifically, the present invention provides a flexible carrier web having a planar surface bearing thereon a predetermined pattern consisting of at least one flat land area and at least one recess, said  
15 recess having a base and walls, said surface bearing thereon a layer of silicone covering at least one of  
20 (a) said land area, and  
(b) said base of said recess,  
said walls of said recess being substantially free from silicone.

One embodiment of the invention provides a flexible carrier web having a planar surface bearing thereon a predetermined pattern consisting of a multiplicity of flat land areas separated by recesses having bases and walls, said surface bearing thereon a  
25 layer of silicone covering at least one of  
30 (a) said land areas, and  
(b) the bases of each recess, wherein the walls of the recesses are substantially free from silicone.

In other embodiments of the invention, one  
35 interconnected land area is circumscribed by separate recesses, or by one interconnected recess. In yet another embodiment of the invention, a multiplicity of land areas are circumscribed by a single interconnected recess.

-5-

Two methods of making the novel carrier web are also provided. The first method provides a flexible carrier web in which only the flat land area(s) are coated.

- 5 Specifically, the first method of making a flexible carrier web, comprises the steps of
- a) forming on a planar surface of a flexible backing a predetermined pattern consisting of at least one flat land area and at least
  - 10 recess having bases and walls,
  - b) applying to the land area a layer of a silicone, and
  - c) immediately solidifying the silicone by crosslinking said silicone.

- 15 In the second method, a flexible carrier web having a flat, unembossed surface bearing a layer of silicone is embossed to form the recesses while breaking the silicone coating at the edges of the recesses to leave the walls of the recesses substantially free from
- 20 the silicone.

#### Summary of the Drawing

In the drawing, each figure is a schematic.

- FIG. 1 is an edge view of a first flexible
- 25 carrier web of the invention;

FIG. 2 is an edge view of an adhesive tape, the backing of which is a second flexible carrier web of the invention; and

- FIG. 3 is an edge view of a third flexible
- 30 carrier web of the invention.

#### Detailed Description of the Invention

- Silicones suitable for use in articles of the invention include various well-known silicones used for
- 35 release coatings for pressure-sensitive adhesives. These include diorganopolysiloxanes, e.g., diphenyl-polysiloxanes, and dimethylpolysiloxanes such as those disclosed in U.S. Patent Nos. 3,061,567, and 3,527,659. Ultraviolet radiation-curable silicones are useful, e.g.,

-6-

mercaptoalkyl substituted polysiloxanes, epoxyfunctional polysiloxanes, and acrylic functionalized polysiloxanes, as disclosed in U.S. Patent Nos. 4,547,431, and 4,576,999.

5                   Also useful are combinations of vinyl endblocked diorganopolysiloxanes in which from 3 to 30 mole percent of the nonterminal siloxane units and at least 50 mole percent of the remaining radicals on the siloxane units are methyl radicals, and  
10                   organopolysiloxanes which have at least 3 Si-bonded hydrogen atoms per molecule as disclosed in U.S. Patent No. 4,208,504.

                  Preferably, the silicone is crosslinked to ensure against accidental transfer to substrates which it  
15                   may contact. Such silicones typically are crosslinked by exposure to heat, ultraviolet radiation, or electron beams. Crosslinking is especially desirable when a silicone layer is used as a release surface for a pressure-sensitive adhesive layer, as the adhesive might  
20                   otherwise become contaminated by the silicone.

                  Virtually any material that has been used for flexible carrier webs of the prior art can be used as the flexible backing of the carrier web of the present invention. A preferred backing is kraft paper which has  
25                   a coating of polyethylene that can be thermally embossed on a metal master to form recesses. Also useful are thermoplastic films which can be cast onto a master surface that is formed with protrusions to be replicated to form the recesses of the novel carrier web. Useful  
30                   replicating techniques include that disclosed in coassigned U.S. Pat. No. 4,576,850 (Martens).

                  Two methods of making articles of the invention are disclosed. In the first, the carrier web  
35                   is formed with a predetermined pattern of recesses, after which a thin coating of a silicone liquid is applied and then solidified by crosslinking before the silicone can flow into the recesses. To guard against such flow, the coating should be thin compared to the depth of the recesses, preferably one-tenth of the depth of the

-7-

recesses or less. The use of a silicone liquid that is solventless also helps to prevent such flow.

While only the land is coated with silicone in the first method, both the land and the base of each recess can be coated in a second preferred method. A flexible carrier web having a flat, unembossed surface bearing a layer of silicone is embossed to form the recesses while breaking the silicone coating at the edges of the recesses to leave the walls of the recesses substantially free from the silicone. Unless the embossing tool is pointed, the second method leaves a layer of silicone at the base of each recess, while the uncoated walls of the recesses separate the silicone layers.

If desired, the second method can also be used to produce patterns wherein only the bases of the recesses are coated with silicone. A step is simply added wherein the silicone layer covering the land is abraded away, leaving only the silicone layer at the base of each recess. When the first method is used, the base may be minimal, e.g., an inverted cone having a small point as a base, may be used.

In either method, a single interconnected recess may circumscribe one or more land areas, or the recesses may be disconnected. The recess(es) can form a continuous grid that separates the flat surface between the recesses into a discontinuous land. Indeed, both recesses and the land can extend uninterruptedly across the flexible carrier web. The disconnected recesses are individual dimples, which can be made in various shapes such as inverted truncated cones or pyramids.

Regardless of their shape, the recesses should have a depth of at least 2  $\mu\text{m}$ , preferably a uniform depth of from 5 to 100  $\mu\text{m}$ , and the walls of the recesses form an angle of at least 20° with the land of the carrier web. The silicone layer preferably is no more than 2  $\mu\text{m}$  in thickness, more preferably less than 1  $\mu\text{m}$ .

When the novel flexible carrier web provides a release surface for a pressure-sensitive adhesive layer,

-8-

it can serve either as a permanent backing or as a disposable release liner. The recesses preferably are of uniform shape and uniformly spaced in an orderly array, e.g., square or hexagonal, to afford uniform release values. Release values can be increased simply by making the recesses broader.

When only the land of the novel flexible carrier bears a silicone layer, a slurry of particles (whether aqueous or organic) does not wet the silicone but covers the uncoated walls and bases of the recesses. A dried residue of the slurry can be transferred on contact to a flat substrate such as a tacky adhesive layer, because the adhesive releases from the silicone layer, carrying with it particles in the pattern of the recesses.

When both the land and the bases of the recesses bear a silicone layer, a slurry of particles will preferentially cover only the uncoated walls of the recesses, and the dried residue of the slurry will transfer in the pattern of the walls of the recesses - e.g., a donut shape in the case in which the recesses are inverted truncated cones.

When a flexible carrier web of the invention is coated with dry particles, the particles tend to adhere only to the silicone layer, from which they can be transferred on contact to a flat substrate such as a tacky adhesive layer in the pattern of the land (or in the pattern of the land plus the bases of the recesses when the base of each recess bears the silicone). When the silicone layer covering the land has been abraded away, dry particles remain adhered only to the silicone at the base of each recess and so are transferred in the pattern of the bases.

By controlling the number, size, shape, and pattern of the recesses, the numbers of particles to be transferred to a flat substrate can be kept to a minimum, whether the particles were transferred from the land or from the bases of the recesses or from the walls of the recesses. Minimizing the number of particles minimizes

-9-

the cost of the particles and, when the flat substrate is a tacky adhesive layer, that layer can form stronger bonds than if it were to receive a larger number of particles.

5           For example, when particles are transferred from the novel flexible carrier web to a tacky adhesive layer to make it repositionable, a relatively small number of particles in a predetermined pattern can keep the adhesive from touching a flat substrate, thus  
10       allowing it to be repositioned until pressure is applied to force the adhesive against the substrate.

          When the transferred particles are electrically conductive and are transferred only from the recesses, they can make the adhesive electrically  
15       conductive through its thickness and yet be laterally spaced so that the adhesive layer is electrically insulating laterally. Alternatively, the electrically conductive particles can be transferred only from the land of the carrier web so as to leave areas of adhesive  
20       particle-free in order to increase bonding. When desired, the recesses can be so positioned that particles are transferred only to locations where the adhesive layer is to be contacted by electrodes that are to be electrically interconnected.

25           When the novel flexible carrier web is to be used to make a tacky adhesive tape repositionable or to make an adhesive layer electrically conductive only in the Z-axis direction, the individual recesses preferably are dimples that are small and closely spaced, e.g., from  
30       10 to 50  $\mu\text{m}$  in breadth and can be in an orderly array having a center-to-center spacing of from 50 to 250  $\mu\text{m}$ .

          When the recesses are long and narrow, electrically conductive particles can be transferred to an adhesive layer to form stripes of laterally contiguous  
35       particles that effort electrical conductivity along both the Z-axis and the length of each stripe. An array of such stripes that are nonintersecting can be used to make individual electrical connections between two bands of electrodes that cannot be superimposed, thus forming a

-10-

product like that of U.S. Pat. No. 4,546,037 (King).

The flexible carrier web of the invention can be put to a number of uses in addition to those mentioned above. For example, particles that have been deposited  
5 either in the recesses or on the land of the carrier web can be transferred in such large quantities as to make a pressure-sensitive layer permanently nontacky wherever the particles are transferred. By thus providing both tacky and nontacky surfaces, the adhesive layer can be  
10 peeled from a substrate to which the tack surfaces form a strong bond. Such an adhesive layer can be put to a variety of uses such as to permit paper notes to be adhered temporarily to diverse substrates.

The novel flexible carrier web can take a  
15 variety of forms, a few of which are illustrated in the drawing.

#### Detailed Description of the Drawings

In FIG. 1, a flexible carrier web 10 has a  
20 flexible plastic backing 12 having flat surface except where it has been embossed to form a plurality of recesses including a rounded recess 13, a conical recess 14, and two truncated pyramidal recesses 15 and 16, each of which can be called a "dimple". Ordinarily, only one  
25 such recess shape would be employed in a single flexible carrier, and the recesses would be in an orderly pattern, e.g. a hexagonal or square array. The walls of the truncated pyramidal recess 15 form an angle of 45° with the land between the recesses, while the walls of the  
30 truncated pyramidal recess 16 form an angle of 80°. Covering the land is a layer 17 of silicone that preferably is crosslinked.

Shown in FIG. 2 is an adhesive tape 20 that has a flexible plastic backing 21. A silicone layer 22  
35 has been applied to one flat surface of the plastic backing, after which the silicone-bearing surface has been embossed to form truncated pyramidal recesses 24, the walls of which form an angle of 45° with the land. There is thus produced a second flexible carrier web of

-11-

the invention which includes disconnected segments 25 of the silicone layer 22 at the bases of the recesses.

Covering the other flat surface of the plastic backing 21 is a low-adhesion backsize coating 26 that in turn is covered with a layer 28 of pressure-sensitive adhesive. When the tape 20 is wound upon itself into a roll and later unwound, the adhesive layer 28 separates from whichever of the low-adhesion backsize coating 26 and silicone layer 22 affords a lower release value. After doing so and adhering the exposed face of the adhesive layer to a flat substrate, the backing 21 can be peeled off, leaving the pressure-sensitive adhesive layer 28.

In FIG. 3, the silicone layer 22 that covered the land of the second flexible carrier web of FIG. 2 has been abraded away, thus providing a flexible carrier web 30 wherein only the base of each recess 24 bears a silicone layer 25, while the land is uncoated.

In the following examples, all parts, percentages and ratios are by weight unless specifically stated otherwise. The Examples are for illustrative purposes only, and are not meant to be limiting. The scope of the invention is solely that which is defined by the claims.

25

#### Example 1

A 125 g/m<sup>2</sup> kraft paper coated on each side with 36 g/m<sup>2</sup> of low density polyethylene was thermally embossed to have 26 recesses or dimples per cm arranged in a square lattice array to provide 676 recesses/cm<sup>2</sup>. Each recess was an inverted truncated cone 0.15 mm in diameter at the surface and 0.1 mm in diameter at its depth of 17  $\mu$ m. A 100% solids, UV-curable silicone release coating (General Electric US9300 with 3% US9310C catalyst) was applied in a layer of about 0.75  $\mu$ m thickness to the embossed surface of the paper using an offset gravure coating head. The silicone coating was crosslinked by passing it under four medium pressure mercury lamps at 12 m/min to give a smear-free coating.

-12-

The utility of this silicone coated embossed carrier web in modifying release properties was tested by preparing an adhesive laminate. A solvent-based acrylic copolymer pressure-sensitive adhesive was cast directly onto the silicone coated embossed surface, dried at 70°C for 15 minutes, and a 50  $\mu\text{m}$  polyester film was laminated to the adhesive layer. This laminate was tested by peeling the polyester (with adhesive) from the release liner at a 180° angle at 230 cm/min. The release value of a laminate prepared in this manner and aged at room temperature for 3 days was 32 N/m of width. The release value of the same laminate which was aged at 70°C for 3 days was 42 N/m of width. For comparison, the release values for the same UV cured silicone on an unembossed polyethylene coated kraft paper were 10-15 N/m of width after aging at 70°C for 3 days.

#### Example 2

An 80  $\mu\text{m}$  polypropylene film containing 46%  $\text{CaCO}_3$  filler was embossed to provide 26 recesses/cm in a square lattice array. Each recess was an inverted truncated cone 320  $\mu\text{m}$  in diameter at the surface and 90  $\mu\text{m}$  in diameter at its depth of 60  $\mu\text{m}$ .

This embossed carrier web was coated with a 0.3  $\mu\text{m}$  layer of Dow Corning 7676 solventless silicone release system on a five smooth-roll coater. The coating was thermally cured by passing the coated film at 7.6 m/min through a 4.3 m oven heated to 104°C to give a smear-free silicone layer.

About 20 cm of the silicone coated embossed film of this example was flood coated with Ag coated glass beads. The beads were agitated on the surface of the film by moving a rolling bank of beads across the film. The bead bearing film was then turned over and tapped to jar loose any unattached beads. Examination of the bead coated surface with a light microscope revealed beads substantially only on the flat surface or land between the recesses. The embossed film bearing the metalized glass beads was not laminated to a transfer

-13-

tape that consisted of 50  $\mu\text{m}$  of "Primacor" 1410 (Dow) heat-activatable adhesive on a release liner. Separation of the embossed film from the tape transferred the metalized glass beads to the transfer tape. The beads in the transfer tape maintained the pattern established by the silicone coated embossed film, i.e., there was an absence of particles in a regular pattern that corresponded to the recesses on the embossed film. A section of this transfer tape was used to bond two copper strips (1 mm by 1.5 cm by 6 cm with a lap bond area of about 1.4  $\text{cm}^2$ ) together using a hand held iron. After cooling, the two copper strips were adhesively bonded (room temperature lap shear stress > 150 kPa when tested at a rate of 0.13 mm/min), and the resistance between the two strips was measured to be < 0.2 ohms.

### Example 3

A 75  $\mu\text{m}$  thick cast polypropylene film containing 2%  $\text{TiO}_2$  filler was coated with Dow Corning Syl-Off 294 solvent-based silicone release system using a direct gravure coater. After heating to remove solvent and crosslink the silicone, the final thickness of the silicone layer was approximately 0.1  $\mu\text{m}$ .

The resulting carrier web was thermally embossed by passing the film between a metal embossing roll and a 70 Durometer rubber backing roll. The metal roll had 16 projections per cm arranged in a square lattice array to provide 256 projections/ $\text{cm}^2$ . Each projection was a 0.15 mm high truncated cone with diameters at the bottom and top of 0.4 mm and 0.1 mm, respectively. Both rolls were heated to 95°C and the film embossed at a nip force of 5500 N/m to provide recesses in the film. Each recess was an inverted truncated cone 0.12 mm in diameter at the surface and 0.1 mm in diameter at its depth of 17  $\mu\text{m}$ .

The embossed carrier web of this example was decorated with Ag coated glass beads as described in Example 2. Examination of the film with a light microscope revealed two monolayers of glass beads; one on

-14-

the bases of the recesses and the other on the land areas. The presence of Ag coated beads on the bases of the recesses revealed that these surfaces were coated with silicone.

5           Using a motor driven silk screen frame, another piece of the embossed carrier web of this example was then coated with the following slurry: 88 parts isopropanol, 10 parts water, 2 parts "Ethocel" standard  
10       100 grade ethyl cellulose (Dow) and 150 parts of glass beads (5000 grade from Potters Industries, Inc.). A 70 Durometer 9.5 mm urethane rubber blade with a square edge was used as the doctor. The blade was set with a 30° from vertical trailing angle.

          After air drying at room temperature, a  
15       section of the coated embossed carrier web was examined with a light microscope and found to have rings or donuts of dried slurry contacting the sidewalls of the recesses. The coated embossed film was laminated to the adhesive  
20       layer of a pressure-sensitive adhesive coated vinyl film ("Scotchcal" 3690 from 3M). Delamination transferred the clusters to the adhesive on the vinyl film. The clusters  
of glass beads on the surface of the adhesive permitted repositioning of the film on smooth substrates, such as  
25       glass. Once positioned, the application of pressure to the back of the film was sufficient to form an aggressive bond.

-15-

What is Claimed is:

1. A flexible carrier web having a planar surface bearing thereon a predetermined pattern consisting of at least one flat land area and at least one recess, said recess having a base and walls, said surface having a layer of silicone covering at least one of
  - (a) said land area, and
  - (b) said base of said recess, said walls of said recess being substantially free from silicone.
2. The flexible carrier web of claim 1 wherein said layer of silicone is crosslinked.
3. The flexible carrier web of claim 1 wherein the walls of the recess form an angle of at least 20° with the land area, and wherein the depth of the recess is at least 2  $\mu\text{m}$ .
4. The flexible carrier of claim 1 wherein said predetermined pattern comprises a multiplicity of land areas, surrounded by an interconnected recess, said recess being in the form of a grid.
5. The flexible carrier of claim 1 whereon said predetermined pattern comprises a multiplicity of recesses circumscribed by one interconnected land area, said land area being in the form of a grid.
6. The flexible carrier web of claim 1 consisting of a multiplicity of land areas separated by a multiplicity of recesses, wherein the recesses have a uniform depth of from 5 to 100  $\mu\text{m}$ .
7. The flexible carrier web of claim 6 wherein the recesses are disconnected dimples selected from truncated pyramids, truncated cones, and rounded

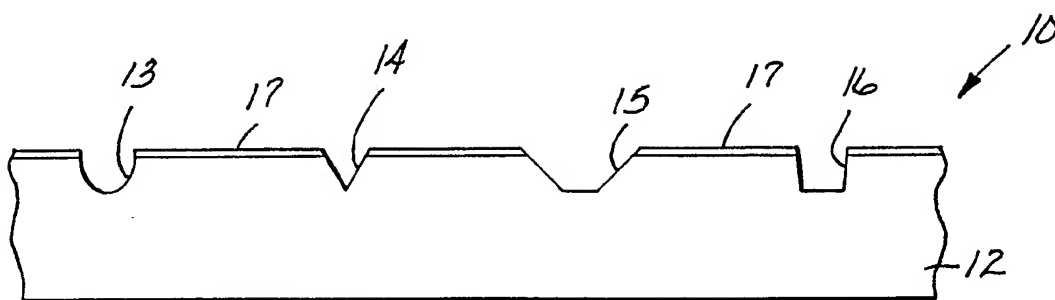
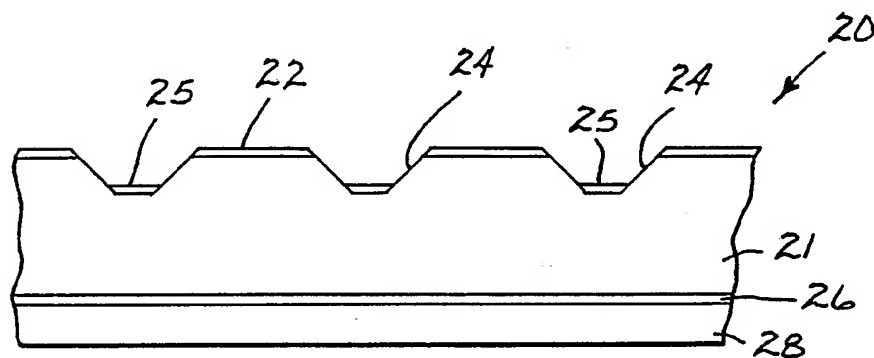
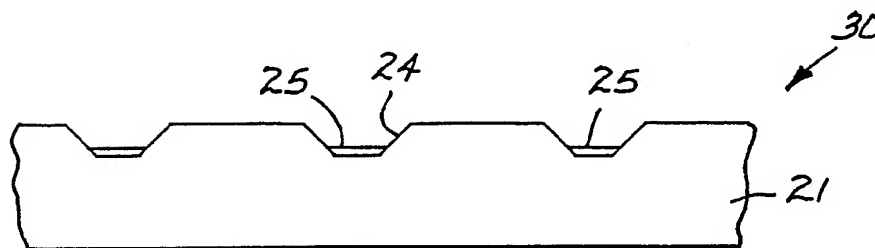
-16-

depressions.

8. The flexible carrier web of claim 7  
wherein the dimples are from 10 to 50  $\mu\text{m}$  in breadth and  
5 are in an orderly array having a center-to-center spacing  
of from 50 to 250  $\mu\text{m}$ .

9. A method of making a flexible carrier web,  
comprising the steps of  
10 a) forming on a planar surface of a flexible  
backing a predetermined pattern consisting of  
at least one flat land area and at least one  
recess, said recess having a base and walls,  
said recess having an average depth of at  
15 least about 5 micrometers, and  
b) applying to said land area a layer of a  
silicone, and  
c) immediately crosslinking said silicone such  
that said silicone does not flow into said  
20 recess.

10. Method of making a flexible carrier web,  
which method comprises the steps of  
25 a) applying to a planar face of a flexible backing  
a silicone layer to form a silicone-bearing face,  
b) embossing said silicone-bearing face of said  
flexible backing to form at least one land area and  
one recess while breaking the silicone layer at the  
edges of said recess to leave the walls of said  
30 recess substantially free from silicone, and  
c) crosslinking said silicone.

*Fig. 1**Fig. 2**Fig. 3*

## INTERNATIONAL SEARCH REPORT

PCT/US 92/05314

International Application No

**I. CLASSIFICATION OF SUBJECT MATTER** (if several classification symbols apply, indicate all)<sup>6</sup>

According to International Patent Classification (IPC) or to both National Classification and IPC

Int.Cl. 5 C09J7/02

**II. FIELDS SEARCHED**Minimum Documentation Searched<sup>7</sup>

Classification System	Classification Symbols
Int.Cl. 5	C09J

Documentation Searched other than Minimum Documentation  
to the Extent that such Documents are Included in the Fields Searched<sup>8</sup>**III. DOCUMENTS CONSIDERED TO BE RELEVANT<sup>9</sup>**

Category <sup>10</sup>	Citation of Document, <sup>11</sup> with indication, where appropriate, of the relevant passages <sup>12</sup>	Relevant to Claim No. <sup>13</sup>
P,X	WO,A,9 113 752 (SANDERS BERNARD) 19 September 1991 see page 13, paragraph 1; figure 14 ---	1
A	WO,A,9 007 560 (MINNESOTA MINING AND MFG. COMPANY) 12 July 1990 cited in the application ---	1
A	EP,A,0 307 578 (BEIERSDORF) 22 March 1989 & DE,A,3 727 078 cited in the application -----	1

<sup>10</sup> Special categories of cited documents :<sup>"A"</sup> document defining the general state of the art which is not considered to be of particular relevance<sup>"E"</sup> earlier document but published on or after the international filing date<sup>"L"</sup> document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)<sup>"O"</sup> document referring to an oral disclosure, use, exhibition or other means<sup>"P"</sup> document published prior to the international filing date but later than the priority date claimed<sup>"T"</sup> later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention<sup>"X"</sup> document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step<sup>"Y"</sup> document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.<sup>"&"</sup> document member of the same patent family**IV. CERTIFICATION**

Date of the Actual Completion of the International Search

14 OCTOBER 1992

Date of Mailing of this International Search Report


21. 10. 92

International Searching Authority

EUROPEAN PATENT OFFICE

Signature of Authorized Officer

GIRARD Y.A.



**ANNEX TO THE INTERNATIONAL SEARCH REPORT  
ON INTERNATIONAL PATENT APPLICATION NO.**

US 9205314  
SA 62018

This annex lists the patent family members relating to the patent documents cited in the above-mentioned international search report.  
The members are as contained in the European Patent Office EDP file on  
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information. 14/10/92

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO-A-9113752	19-09-91	None	
WO-A-9007560	12-07-90	DE-A- 3844250	05-07-90
		AU-A- 4838390	01-08-90
		CA-A- 2006827	29-06-90
		EP-A- 0452368	23-10-91
EP-A-0307578	22-03-89	DE-A- 3727078	23-02-89
		JP-A- 1090279	06-04-89